

one-axle series 2024

one-axle

Since 1960

ZACCARIA
QUALITY TRAILERS



Since 1960

ZACCARIA

QUALITY TRAILERS

2024 RANGE

One- axle trailers



2 – 3 axles trailers



Forestry trailers



Zootechnics trailers



Platforms



Vineyard trailers



Monocoques



Special trailers



- Over 60 years
of experience

- Over 30.000 sold
trailers

- Over 100 models
in production

- 6 EIMA Technical
Innovation prizes



ONE AXLE TRILATERAL TIPPING

one-axle

Standard equipment:

Trilateral hydraulic tipping.
Regulatory electrical system.
N.4 winches.
Manual parking stand.
Tube with coupling for hydraulic tipping.
Cardan shaft (when driving axle is present).
Extension sides attachments.
N.2 tubes for front poles.
Cold-galvanized sides.

Optional:

Front bar for wood.
Galvanized toolbox.
Hydraulic brake.
Poles for logs 1,50 mt.
Extension sides.
Tubes for lateral or rear poles (inside the trailer body).



ZAM 20 M

DRIVING AXLE VERSION	MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	FLOOR HEIGHT cm	BRAKE
	ZAM 15 M	230X150X35	1,5	0,6	27x8.50-15	74	Mechanical
	ZAM 20 M	230X150X35	2	0,6	27x8.50-15	74	Mechanical
NORMAL VERSION	MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	FLOOR HEIGHT cm	BRAKE
	ZAM 15 N	230X150X35	1,5	0,5	10.0/80-12	74	Mechanical
	ZAM 20 N	230X150X35	2	0,5	10.0/80-12	74	Mechanical

one-axle



ZAM 50/40 MS
with extension sides

DRIVING AXLE VERSION TRILATERAL TIPPING

Standard equipment:

Trilateral hydraulic tipping.
Regulatory electrical system.
N.4 winches.
Manual parking stand.
Tube with coupling for hydraulic tipping.
Cardan shaft.
Extension sides attachments.
N.2 tubes for front poles.
Rear columns.
Downwards/upwards opening of the rear side.
Painted sides.
Under-chequered metal sheet floor.
Mechanical or hydraulic brake.

Optional:

Downwards/upwards opening of the lateral sides.
Front bar for wood. Rear opening for cereal dumping. Galvanized toolbox.
Brake control approved device for tractor without trailer brake valve.
Hydraulic brake. Poles for logs 1,50 mt.
Hydraulic parking stand. Mechanical iron ramps (payload 4 Tons).
Special gearbox for the connection to 2 different tractors.
Net extension sides H 80 cm. Extension sides.
Aluminium sides and extension sides. Comas sides.
Tubes for lateral or rear poles (inside the trailer body).

DRIVING AXLE VERSION	MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	TIRES on demand	FLOOR HEIGHT cm	BRAKE
	ZAM 25 M	260x160x40	2,5	0,80	10.0/80-12	-	76	Mechanical
	ZAM 30 M	280x180x50	4	0,95	10.0/75-15.3	-	83	Mechanical
	ZAM 50/40 M	300x185x50	4,4	1	10.0/75-15.3	-	92/98	Mechanical
	ZAM 50/50 SM	350x200x50	6	1,28	11.5/80-15.3	14-17,5 forestry use	92/98	Hydraulic

NORMAL VERSION TRILATERAL TIPPING

Standard equipment:

Trilateral hydraulic tipping.
Regulatory electrical system.
N.4 winches. Manual parking stand.
Tube with coupling for hydraulic tipping.
Extension sides attachments.
N.2 tubes for front poles.
Rear columns.
Downwards/upwards opening of the rear side.
Cold-galvanized sides.
Under-chequered metal sheet floor.
Mechanical or hydraulic brake.

Optional:

Downwards/upwards opening of the lateral sides.
Front bar for wood. Rear opening for cereal dumping. Galvanized toolbox.
Brake control approved device for tractor without trailer brake valve.
Hydraulic brake. Poles for logs 1,50 mt.
Hydraulic parking stand.
Mechanical iron ramps (payload 4 Tons).
Special gearbox for the connection to 2 different tractors.
Net extension sides H 80 cm. Extension sides.
Aluminium sides and extension sides. Comas sides.
Tubes for lateral or rear poles (inside the trailer body).

ZAM 50/50 N



one-axle

NORMAL VERSION	MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	TIRES on demand	FLOOR HEIGHT cm	BRAKE
	ZAM 25 N	260x160x40	2,5	0,7	10.0/80-12	-	76	Mechanical
	ZAM 30 N	280x180x50	4	0,85	10.0/75-15.3	13.0/55-16	83	Mechanical
	ZAM 50/40 N	300x185x50	4,4	0,9	10.0/75-15.3	13.0/55-16	92/95	Mechanical
	ZAM 50/50 N	350x200x50	5	1,05	11.5/80-15.3	400/60-15,5 or 285/70 R19,5 industrial used	92/95	Mechanical
	ZAM 50/50 SN	350x200x50	6	1,08	11.5/80-15.3		92/95	Hydraulic

one-axle

ZAM 70 SM
with aluminium sides
and industrial columns



DRIVING AXLE VERSION TRILATERAL TIPPING

Standard equipment:

Trilateral hydraulic tipping.
Regulatory electrical system.
N.5 winches. Manual parking stand.
Tube with coupling for hydraulic tipping.
Gearbox for the connection to the tractor. Cardan shaft.
Extension sides attachments. N.2 tubes for front poles.
Rear columns.
Downwards/upwards opening of the rear side.
Painted sides.
Under-chequered metal sheet floor.

On ZAM 70 models, as standard equipment:
Lateral sides divided in halves and with columns.

Optional:

Downwards/upwards opening of the lateral sides.
Front bar for wood. Front bar for round bales.
Rear opening for cereal dumping. Galvanized toolbox.
Brake control approved device for tractor without trailer brake valve.
Poles for logs 1,50 mt. Industrial columns.
Hydraulic parking stand.
Tipping operated by gear pump and PTO shaft.
Special gearbox for the connection to 2 different tractors.
Net extension sides H 80 cm. Extension sides.
Aluminium sides and extension sides. Comas sides.
Tubes for lateral or rear poles (inside the trailer body).

DRIVING AXLE VERSION	MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	FLOOR HEIGHT cm	TIRES on demand	FLOOR HEIGHT cm	BRAKE
	ZAM 60 M	400x220x50	6	1,8	8.5R-17.5 twin new	92	385/55R19.5 single retreaded or 15-19.5 forestry use new	102	Hydraulic
	ZAM 70 SM	500x240x50	6	2,3	9.5R-17.5 twin new	94	445/45R19.5 single retreaded or 15-19.5 forestry use new	102	Hydraulic

NORMAL VERSION TRILATERAL TIPPING

Standard equipment:

Trilateral hydraulic tipping.
Regulatory electrical system.
N.5 winches. Manual parking stand.
Tube with coupling for hydraulic tipping.
Extension sides attachments.
N.2 tubes for front poles.
Rear columns.
Downwards/upwards opening of the rear side.
Painted sides.
Under-chequered metal sheet floor.

On ZAM 70 models, as standard equipment:
Lateral sides divided in halves and with columns.

Optional:

Downwards/upwards opening of the lateral sides.
Front bar for wood. Front bar for round bales.
Rear opening for cereal dumping. Galvanized toolbox.
Brake control approved device for tractor without trailer brake valve.
Poles for logs 1,50 mt. Industrial columns.
Hydraulic parking stand.
Tipping operated by gear pump and PTO shaft.
Net extension sides H 80 cm. Extension sides.
Aluminium sides and extension sides. Comas sides.
Tubes for lateral or rear poles (inside the trailer body).

one-axle



ZAM 70 SN
with aluminium sides
and industrial columns

NORMAL VERSION	MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	FLOOR HEIGHT cm	TIRES on demand	FLOOR HEIGHT cm	BRAKE
	ZAM 60 N	400x220x50	6	1,5	215/75-R17.5 twin new	92	385/55 R19.5 single used	102	Hydraulic
	ZAM 70 SN	500x240x50	6	2	245/70-R17.5 twin new	92	445/45 R19.5 single retreated	102	Hydraulic

one-axle

MONOCOQUES REAR TIPPING

Standard equipment:

Hydraulic rear tipping by tractor distributor.
Watertight metal sheet body.
Manual parking stand.
Watertight hydraulic rear tailgate.
Cardan shaft in the driving axle version.
Regulatory electrical system.

Optional:

Rear opening for cereals dumping.
Manual PVC covering.
Brake control approved device for tractor without trailer brake valve.
Hydraulic parking stand.
550/45-22,5 Flotation new tires.
Rear tipping operated by gear pump and PTO shaft.
Lateral extension sides H 20 cm.
Reinforced body for soil and inert loading.
Inner food painting.

ZAM 70 DPN



DRIVING AXLE VERSION	MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	TIRES on demand	VOLUME m ³	TIPPING	BRAKE
	ZAM 60 DPM	400X220x110	6	2,1	385/55 R22.5 retreated	550/45 R22.5 Flotation new	9	rear	Hydraulic
	ZAM 70 DPM	470X240x110	6	2,5			12		
NORMAL VERSION	MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	TIRES on demand	VOLUME m ³	TIPPING	BRAKE
	ZAM 60 DPN	400X220x110	6	1,9	385/55 R22.5 used	550/45 R22.5 Flotation new	9	rear	Hydraulic
	ZAM 70 DPN	470X240x110	6	2,3			12		

SINGLE AXLE MONOCOQUES REAR TIPPING VERSION

Standard equipment:

Hydraulic rear tipping by tractor distributor.
Watertight metal-sheet body.
Double cylinder for rear tipping.
Manual parking stand.
Oversized axle and wheels.
Regulatory electrical system.

Optional:

Brake control approved device for tractor without trailer brake valve on ZAM 50 D Super model.
Hydraulic brake on ZAM 25 D/40 D models.
Extension sides H 40 cm (Front and lateral).
Rear extension side H 40 cm.
Inner food painting.
Body galvanization. Extension galvanization.
Stainless steel body.

ZAM 40 D
in stainless steel



one-axle



ZAM 50 D

NORMAL VERSION	MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	UNLOADING HEIGHT cm	VOLUME m ³	TIPPING	BRAKE
	ZAM 25 D	265X155X80	2,5	0,6	10-15	110	2,5	rear	Mechanical
	ZAM 40 D	300X175X100	4,4	0,75	10-15	115	3,6		Mechanical
	ZAM 50 D Super	340X190X114	6	1,25	13.0/65-18	115	6		Hydraulic

one-axle

LOADING TRACTORS TRAILERS

Standard equipment:

Regulatory electrical system.

N.2 front winches. Manual parking stand.

Rear tipping platform with double effect hydraulic piston.

Front side.

THE TRAILER IS EQUIPPED WITH A REAR LITTLE SLIDE THAT FACILITATES THE LOADING OPERATIONS.
A REAR SIDE IS NOT NECESSARY TO LOAD MACHINES ON THE TRAILER.



ZAM 50 C

MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	BRAKE
ZAM 50/C	350x160	5	0,8	215/75 R17.5 used	Mechanical
ZAM 50/C SUPER	350x180	5	0,9		

Optional:

Hydraulic brake.
New tires.

ONE AXLE PLATFORMS – REAR TIPPING VERSION

Standard equipment:

Rear tipping platform with double effect hydraulic piston.

Regulatory electrical system.

N.10 winches.

Rear loading board.

Manual parking stand.

Front bar for round bales.

Optional:

Rear bar for round bales.

Galvanized toolbox.


Brake control approved device
for tractor without trailer brake valve.

Hydraulic parking stand.

215/75 R17,5 new tires.

MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	BRAKE
ZAM 60/BR	490x240	6	1,5	215/75 R17.5 twin used	Hydraulic
ZAM 60/BR MAXI	610x245	6	1,8		

ZAM 60 BR

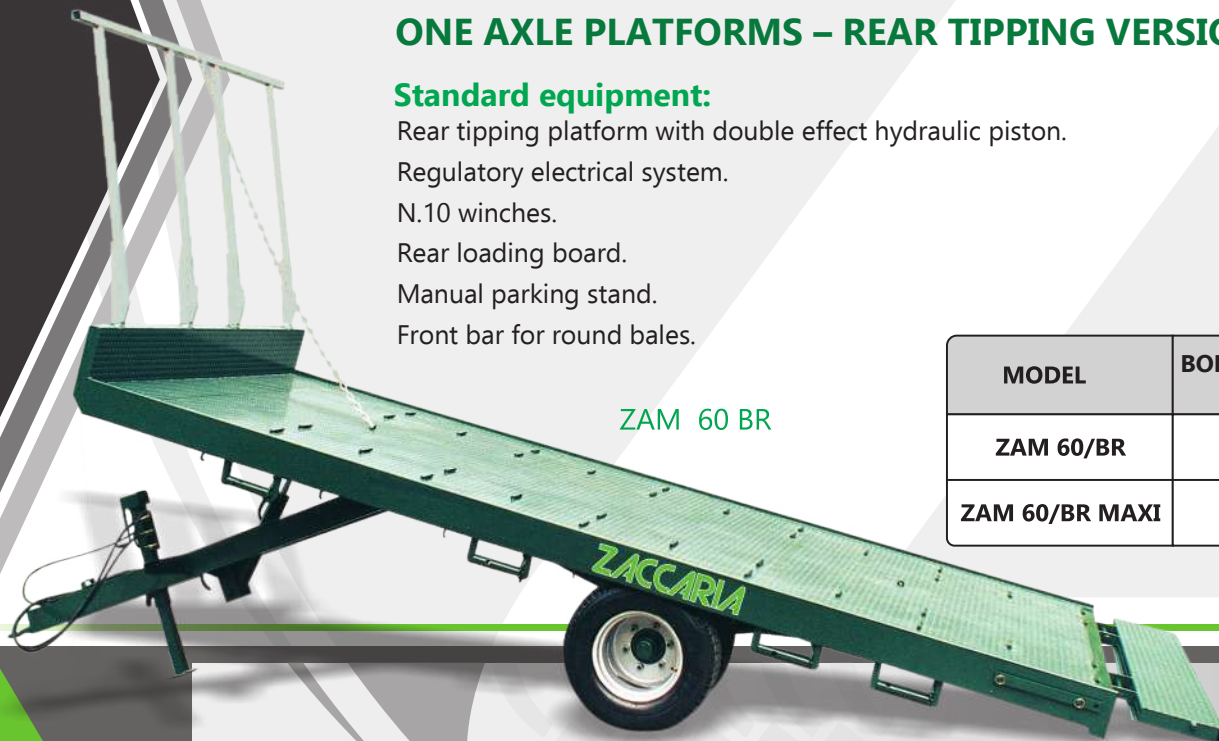

ONE AXLE PLATFORMS FIXED FLOOR

Standard equipment:

Regulatory electrical system.

N.10 winches.

Manual parking stand.

Front bar for round bales.

**N.B. Standard equipment
doesn't include rear ramps.**

Optional:

Driving axle.

Galvanized toolbox.

Brake control approved device
for tractor without trailer brake valve.

Hydraulic parking stand.

500x2000 mm adjustable hydraulic rear ramps,
with mechanical ramps supports.

215/75 R17,5 new tires.



ZAM 60/BF MAXI


MODEL	BODY DIMENSIONS cm	GROSS W. Tons	TARE Tons	TIRES	FLOOR HEIGHT cm	BRAKE
ZAM 60/BF	490x240	6	1,5	215/75 R17.5 used	84	Hydraulic
ZAM 60/BF MAXI	610x245	6	1,8			

ZACCARIA

QUALITY TRAILERS



zaccariamorchi.com

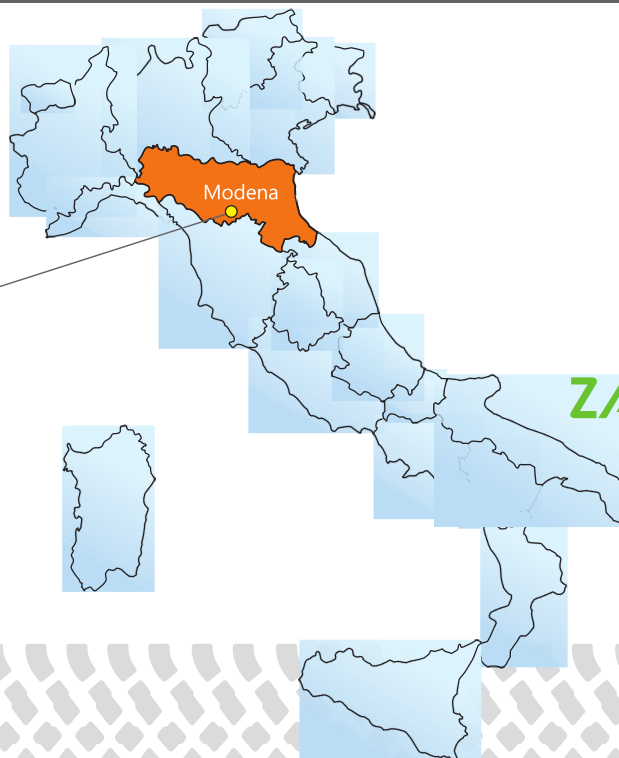

ZACCARIA SRL
Via Enrico Fermi, 350
I - 41055 Montese (Modena) - Italy
Tel. +39 (0)59 981750
Fax: +39 (0)59 982353
www.zaccariamorchi.com
info@zaccariamorchi.com



www.facebook.com/zaccariamorchi



www.linkedin.com/company/zaccaria-srl



www.youtube.com/zaccariatrailer

Branches and Warehouses:

I - 41015 Nonantola (Modena)
Via Zuccola, 12 - Italy



scan the QR CODE
to see
our VIDEOS
[zaccaria trailers youtube](https://www.youtube.com/zaccariatrailer)

